

# Dome Lights

## Installation Instructions

### Product Codes

DM-FM-8W-W	NS-FM-8W-W	DLP-FM-8W-W
DM-FM-8W-B	NS-FM-8W-B	DLP-FM-8W-B
DM-FM-8W-W-010	NS-FM-8W-W-010	DLP-FM-8W-W-010
DM-FM-8W-B-010	NS-FM-8W-B-010	DLP-FM-8W-B-010



## Important Safety Information

Read all instructions before installation. Save instructions for later use.


THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

- Disconnect main power at the source prior to installation.
- Rated for damp locations.
- **WARNING:** Risk of fire or electrical shock.
- Installation hardware not included. Installer to provide site-specific hardware.

## Care Instructions

Gently wipe with a damp cloth to remove dirt, dust, and fingerprints.  
Do not use any chemical cleaning solution.


## Dome Light Shapes



## Wall Mount Instructions

### 01


Remove dome diffuser from backplate by twisting counterclockwise.

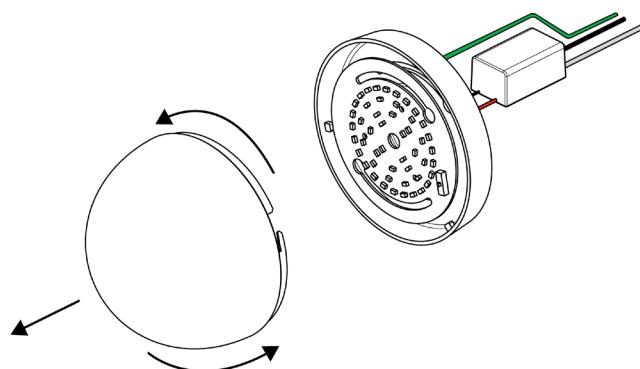

### 02

Make wire connections inside 4 inch x 4 inch octagonal junction box.

- Connect 2 white wires together using wire connector.
- Connect 2 black wires together using wire connector.
- Connect green wire to the ground wire using wire connector or other approved grounding method.
- Place driver in junction box.

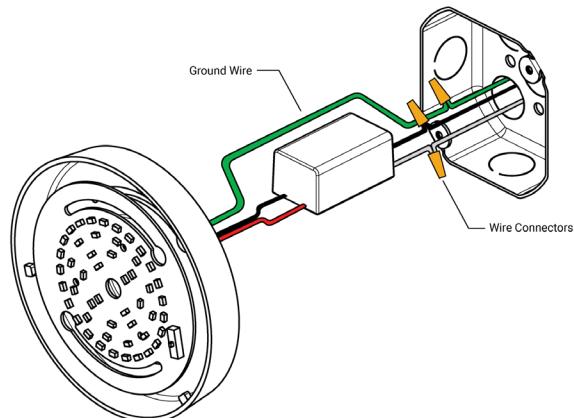


## 03

(A) Attach backplate to 4 inch x 4 inch octagonal junction box using compatible screws.

(B) Rotate backplate clockwise and then tighten screws.


Use switch on LED board to select desired color temperature.

Color Temp Options: 5K, 4K, 3.5K, 3K, 2.7K

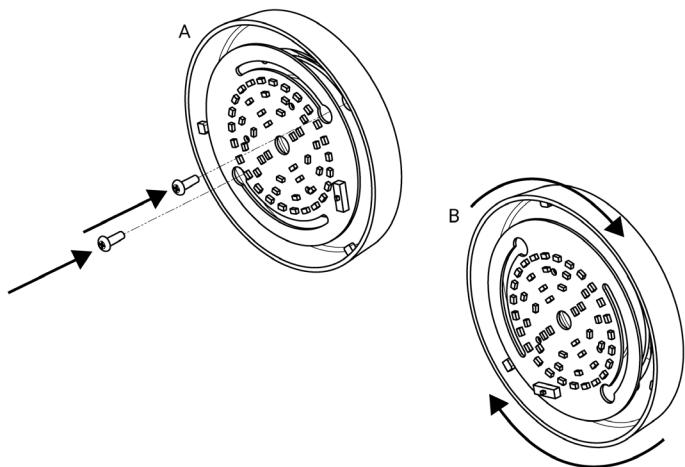

## 04


Re-attach dome diffuser to backplate by turning clockwise.



## Ceiling Instructions

### 01


Remove dome diffuser from backplate by twisting counterclockwise.

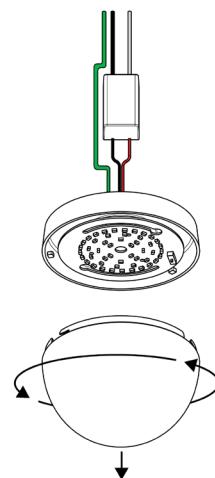

## 02

Make wire connections inside 4 inch x 4 inch octagonal junction box.

- Connect 2 white wires together using wire connector.
- Connect 2 black wires together using wire connector.
- Connect green wire to the ground wire using wire connector or other approved grounding method.
- Place driver in junction box.

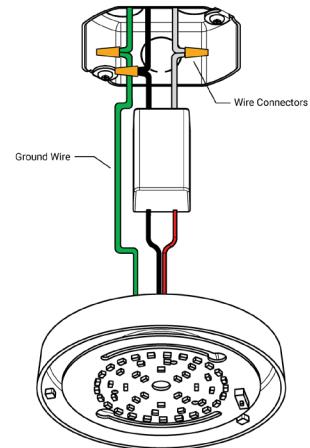


## 03

(A) Attach backplate to 4 inch x 4 inch octagonal junction box using compatible screws.

(B) Rotate backplate clockwise and then tighten screws.

Use switch on LED board to select desired color temperature.

Color Temp Options: 5K, 4K, 3.5K, 3K, 2.7K

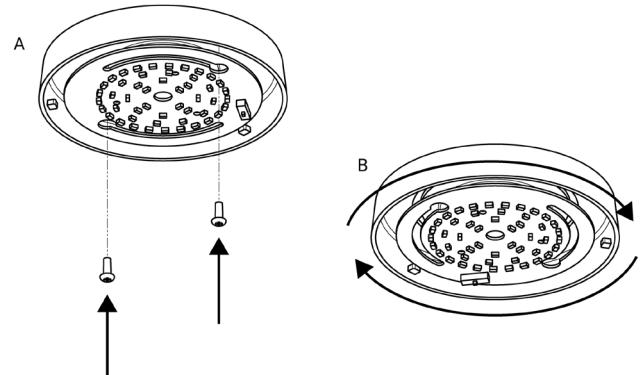

## 04

Re-attach dome diffuser to backplate by turning clockwise.

