


# Astro

Asr1200

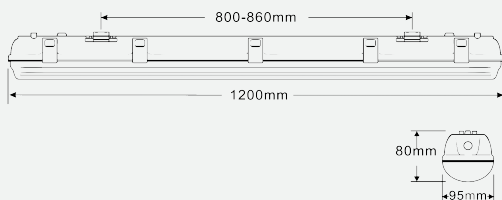


The ability to select your preferred lumen output/wattage within one light fitting.

These are the perfect option when simple functionality is required. Rear and side entry options for easy linking and conduit entry. Combined diffuser and gear tray lead to exceptionally fast fit off. Vandal resistant latches can be secured to stop any tampering. 3 Colour selection with a fixed power driver.



Photometric Diagram

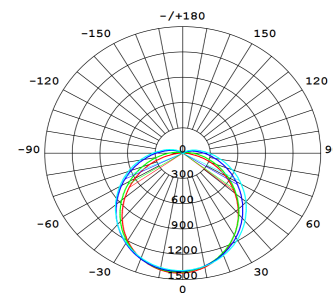

Unit: cd  
 CO/180 106.4deg  
 C90/270 128.0deg

## KEY INFORMATION

Lumen Output	26,00 lm/52,00 lm
Input Power	20W/40W ( Watt-select )
Hole Cutout Size	N/A
Install	N/A
Dimming Options	NON-DIMMABLE
Fitting Colour	Grey base
Warranty	5 yr
IP Rating	IP65
Ik Rating	IK08
IC Rating	N/A

## PHOTOMETRIC

Efficacy	130 lm/W
LED	SMD
CCT	3000/4000/5000K(CCT-Select)
CRI	>80
Beam Angle	120°

## ELECTRICAL

Driver	Integral
Supply Input	200-240V,50/60Hz
Power Factor	>0.95
Useful life @Ta 25°(L70)	50,000hrs
Emergency time	180mins(Emergency Option)
Sensor	Setting via Remote(Sensor Option)

## CONSTRUCTION

Housing	Polycarbonate
Optics	Polycarbonate
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	N/A
Total Weight	1.28 KG
Dimensions	1200x95x80mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1