
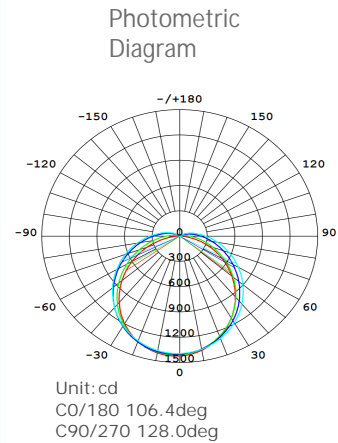
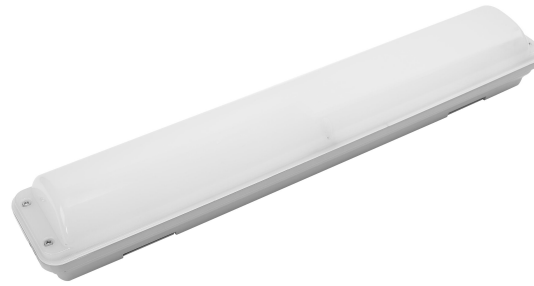


# Atlas

Ats1200

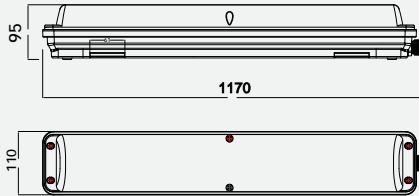

4-Watts Select  
 3-CCT Select

a Strong IK10 robust weatherproof batten, built for tough conditions.

The control gear has been designed to be simplified, ultra-efficient and versatile with Lumen Select Technology, 1 luminaire with multiple wattages/lumen outputs in the same traditional body and diffuser making it easier to replace keeping the same appearance through your installation.

## KEY INFORMATION

Lumen Output	6,240-7,800lm
Input Power	48/52/56/60W (Watt-select)
Hole Cutout Size	N/A
Install	Surface mount
Dimming Options	NON-DIMMABLE/DALI/0-10V Dimming
Fitting Colour	Grey base
Warranty	5 yr
IP Rating	IP65
Ik Rating	IK10
IC Rating	N/A

## PHOTOMETRIC

Efficacy	130 lm/W
LED	SMD
CCT	3000/4000/5000K(CCT-Select)
CRI	>80
Beam Angle	120°

## ELECTRICAL

Driver	Integral
Supply Input	200-240V,50/60Hz
Power Factor	>0.95
Useful life @Ta 25°(L70)	50,000hrs
Emergency time	180mins(Emergency Option)
Sensor	Setting via Remote(Sensor Option)

## CONSTRUCTION

Housing	Diecast Aluminium
Optics	Polycarbonate
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	N/A
Total Weight	3.3 KG
Dimensions	1170x110x95mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1