


Astro

B/G/R/A1200

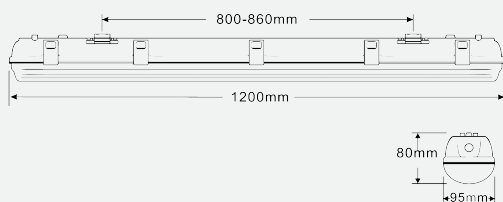


Dual colour selections
 Blue or Green, Red or Amber
 Wavelength / CCT –
 Blue: 450 – 470 nm,
 Green: 510 – 530 nm,
 Amber: 1800 K,
 Red: 615 – 635 nm

These are the perfect option when simple functionality is required. Rear and side entry options for easy linking and conduit entry. Combined diffuser and gear tray lead to exceptionally fast fit off.

Vandal resistant latches can be secured to stop any tampering. Robust polycarbonate/diecasting aluminum body and UV-stabilized polycarbonate diffuser.



Photometric Diagram



Unit: cd
 CO/180 106.4deg
 C90/270 128.0deg

KEY INFORMATION

Dual colour	Blue+Green OR Red+Amber
Dual Wattage	20W/40W (Watt-select)
Hole Cutout Size	N/A
Install	N/A
Dimming Options	NON-DIMMABLE
Fitting Colour	Grey base
Warranty	5 yr
IP Rating	IP65
Ik Rating	IK08/IK10
IC Rating	N/A

PHOTOMETRIC

Blue	450-470nm
Green	510-530nm
Amber	1800K
Red	615-635nm
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	200-240V,50/60Hz
Power Factor	>0.95
Useful life @Ta 25°(L70)	50,000hrs
Emergency time	180mins(Emergency Option)
Sensor	Setting via Remote(Sensor Option)

CONSTRUCTION

Housing	Polycarbonate/Diecasting Alumium
Optics	Polycarbonate
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	N/A
Total Weight	1.28 KG
Dimensions	1200x95x80mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1