


Dusar Emergency

DSR350-EM

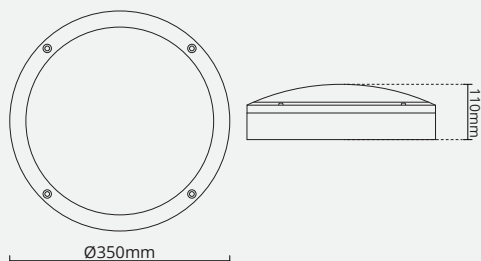


Weather and impact resistant, Selectable colour temperature, LED Bulkhead light

A large round robust bulkhead light constructed with aluminium body and opal diffuser providing decorative solution for both residential and commercial applications.

Accessories
Eyelid TRIM



Photometric Diagram

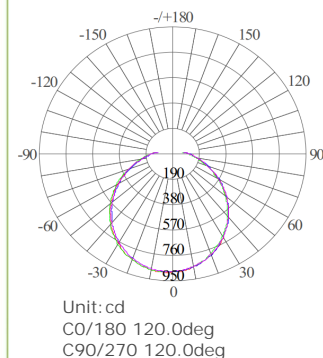

KEY INFORMATION

Lumen Output	3050 lm
Input Power	30W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	NON-DIMMABLE
Fitting Colour	BLACK/White
Warranty	5 yr
IP Rating	IP66
Ik Rating	IK10
IC Rating	N/A

PHOTOMETRIC

Efficacy	100-110 lm/W
LED	SMD
CCT	3000/4000/5000K (CCT-Selectable)
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V,50/60Hz
Power Factor	>0.9
Useful life @Ta 25°(L70)	50,000hrs
Emergency time	3hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	Terminal Block
Total Weight	2.6KG
Dimensions	350x110mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1