


# Luxor

LXR100

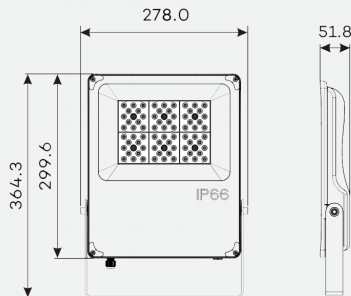


Ultra-efficient  
offset bracket ,  
super slim body,  
LED Flood light

Perfect for any exterior space  
from residential small  
wattage designs through to  
high performance commercial  
applications

Accessories  
Optional Twin Bracket



Photometric  
Diagram

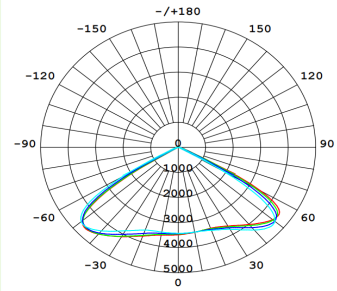

Unit: cd  
C0/180 120.0deg  
C90/270 120.0deg

## KEY INFORMATION

Lumen Output	13,000 lm
Input Power	100W
Hole Cutout Size	N/A
Install	N/A
Dimming Options	NON-DIMMABLE
Fitting Colour	BLACK
Warranty	5 yr
IP Rating	IP66
Ik Rating	IK08
IC Rating	N/A

## PHOTOMETRIC

Efficacy	130 lm/W
LED	SMD
CCT	3000/4000/5000K
CRI	>80
Beam Angle	90°/120°/Asymmetric

## ELECTRICAL

Driver	Integral
Supply Input	90-305V,50/60Hz
Power Factor	>0.95
Useful life @Ta 25°(L70)	50,000hrs
Emergency time	N/A
Sensor	N/A

## CONSTRUCTION

Housing	Aluminium
Optics	Tempered Glass
Adjustable Angle	180°
Fixings/Hardware	Mounting Screws
Connection Type	N/A
Total Weight	5.2KG
Dimensions	364.3x278.0x51.8mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1