


Luxor

LXR150

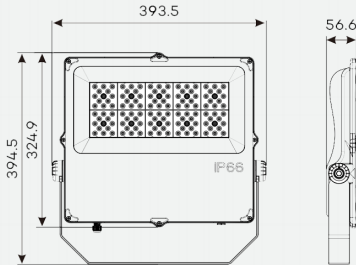


Ultra-efficient
offset bracket ,
super slim body,
LED Flood light

Perfect for any exterior space
from residential small
wattage designs through to
high performance commercial
applications

Accessories
Optional Twin Bracket



Photometric
Diagram

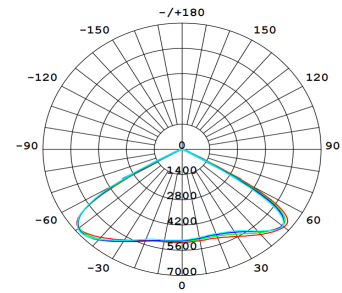

Unit: cd
C0/180 120.0deg
C90/270 120.0deg

KEY INFORMATION

Lumen Output	19,500 lm
Input Power	150W
Hole Cutout Size	N/A
Install	N/A
Dimming Options	NON-DIMMABLE
Fitting Colour	BLACK
Warranty	5 yr
IP Rating	IP66
Ik Rating	IK08
IC Rating	N/A

PHOTOMETRIC

Efficacy	130 lm/W
LED	SMD
CCT	3000/4000/5000K
CRI	>80
Beam Angle	90°/120°/Asymmetric

ELECTRICAL

Driver	Integral
Supply Input	90-305V,50/60Hz
Power Factor	>0.95
Useful life @Ta 25°(L70)	50,000hrs
Emergency time	N/A
Sensor	N/A

CONSTRUCTION

Housing	Aluminium
Optics	Tempered Glass
Adjustable Angle	180°
Fixings/Hardware	Mounting Screws
Connection Type	N/A
Total Weight	6.6KG
Dimensions	394.5x393.5x56.6mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1