

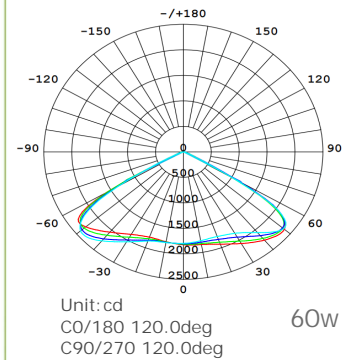
Nexus

NES100

3-CCT(3K/4K/5K) and
 3-Watts (30W/60W/100W)
 in one fitting

Ultra-efficient
 offset bracket ,
 super slim body,
 LEDFlood light

Perfect for any exterior space
 from residential small
 wattage designs through to
 high performance commercial
 applications


 Photometric
 Diagram


KEY INFORMATION

Lumen Output	3,000-10,000lm
Input Power	30W/60W/100W
Hole Cutout Size	N/A
Install	N/A
Dimming Options	NON-DIMMABLE
Fitting Colour	BLACK
Warranty	3 yr
IP Rating	IP66
Ik Rating	IK08
IC Rating	N/A

PHOTOMETRIC

Efficacy	100 lm/W
LED	SMD
CCT	3000/4000/5000K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	200-240V,50/60Hz
Power Factor	>0.9
Useful life @Ta 25°(L70)	50,000hrs
Emergency time	N/A
Sensor	N/A

CONSTRUCTION

Housing	Aluminium
Optics	Tempered Glass
Adjustable Angle	180°
Fixings/Hardware	Mounting Screws
Connection Type	N/A
Total Weight	2.0KG
Dimensions	250 x167 x42 mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1