


# Skyla

Sky100-S

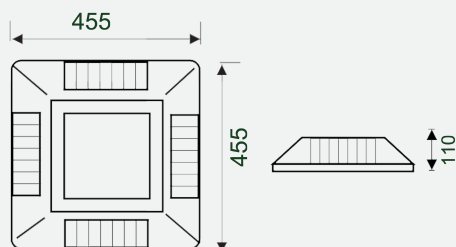

An industrial-grade commercial fixture for ceiling and canopy lighting.


The uniquely designed housing ensures optimum thermal management for the integrated LED module. SKYLA series is easy to install onto a variety of ceiling surfaces and can be used for any industrial or commercial project. Typical applications include carparks, petrol stations, warehouses etc.

## Optional Accessories

Installation plate



Photometric Diagram



Unit: cd  
 CO/180 120.3deg  
 C90/270 120.7deg

## KEY INFORMATION

Lumen Output	10,000 lm
Input Power	100W
Hole Cutout Size	N/A
Install	N/A
Dimming Options	NON-DIMMABLE
Fitting Colour	White
Warranty	5 yr
IP Rating	IP66
Ik Rating	IK10
IC Rating	N/A

## PHOTOMETRIC

Efficacy	100 lm/W
LED	SMD
CCT	5000K
CRI	>80
Beam Angle	120°

## ELECTRICAL

Driver	Meanwell
Supply Input	90-305V,50/60Hz
Power Factor	>0.95
Useful life @Ta 25°(L70)	50,000hrs
Emergency time	N/A
Sensor	N/A

## CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	N/A
Total Weight	6.7KG
Dimensions	455x455x110mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1