


Skyla

Sky200-L

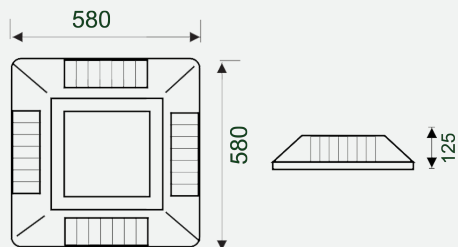

An industrial-grade commercial fixture for ceiling and canopy lighting.


The uniquely designed housing ensures optimum thermal management for the integrated LED module. SKYLA series is easy to install onto a variety of ceiling surfaces and can be used for any industrial or commercial project. Typical applications include carparks, petrol stations, warehouses etc.

Optional Accessories

Installation plate



Photometric Diagram

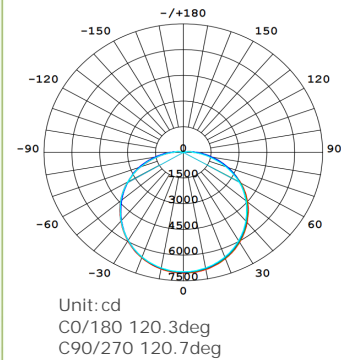

KEY INFORMATION

Lumen Output	24,000 lm
Input Power	200W
Hole Cutout Size	N/A
Install	N/A
Dimming Options	NON-DIMMABLE
Fitting Colour	White
Warranty	5 yr
IP Rating	IP66
Ik Rating	IK10
IC Rating	N/A

PHOTOMETRIC

Efficacy	120 lm/W
LED	SMD
CCT	5000K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Meanwell
Supply Input	90-305V,50/60Hz
Power Factor	>0.95
Useful life @Ta 25°(L70)	50,000hrs
Emergency time	N/A
Sensor	N/A

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	N/A
Total Weight	11.3KG
Dimensions	580x580x125mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1