


Talos

Tls60

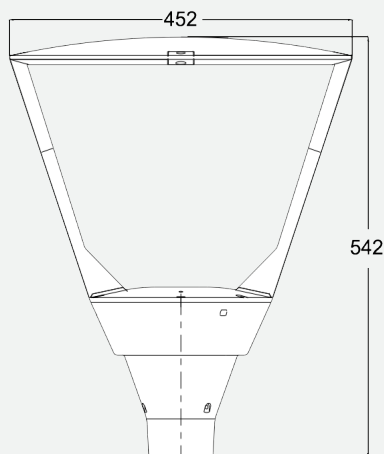


A slimline performance

LED Post Top Lantern
with improved efficacy
and
output.

Talos offers a choice of
optics with asymmetrical
distribution including an area
optic.



Photometric
Diagram

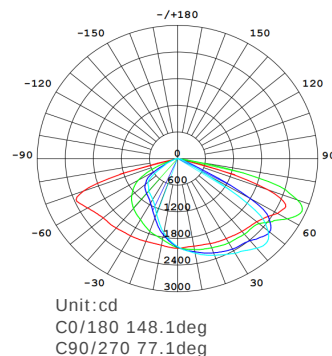

KEY INFORMATION

Lumen Output	6,000 lm
Input Power	60W(Dimmable)
Hole Cutout Size	N/A
Install	N/A
Dimming Options	DIMMABLE Via Remote
Fitting Colour	BLACK
Warranty	5 yr
IP Rating	IP66
	IK08
Spigot	76mm or 60mm

PHOTOMETRIC

Efficiency	100lm/w
LED	SMD
CCT	3000K-5000K Dimmable Via Remote
CRI	80
Beam Angle	70°x150°/150°x80°/50°x140°/140°x140°

ELECTRICAL

Driver	Integral
Supply Input	220-240V,50/60Hz
Power Factor	>0.9
Useful life @Ta 25°(L70)	50,000hrs
Emergency time	N/A
Sensor	Optional

CONSTRUCTION

Housing	Aluminium
Optics	Tempered Glass
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	N/A
Total Weight	5.8 KG
Dimensions	Ø452 × H542 mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1