


Uranx Solar

Urx-sl

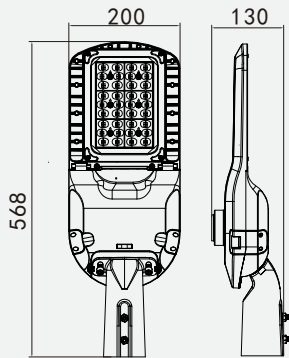


Carefully matched packages of solar panel (with Battery), Light head (with Controller) and Cabling.

Plug-and-play pairing of light head and solar panel unit. Quality componentry matched for reliability of output as a top priority


Optional Accessories
Spigot 60mm/76mm/89mm

KEY INFORMATION

- Plug & Play connectivity
 Rating: IP66
 Impact Rating: IK10 (Light head), IK08 (Solar Panel)
 304 stainless steel screws included
 Accessories: Bird spikes included
 Spigot Options: Ø60mm/Ø76mm/Ø89mm
- Pre-program: Auto-ON at dusk. Auto-OFF at dawn
 - Built-in infra-red motion sensor regulates light output automatically.
 - Changes from dim mode (30%) to bright mode (100%) upon motion detection.
 - Working time: ≥10hrs bright mode. ≥30 hrs dim mode.

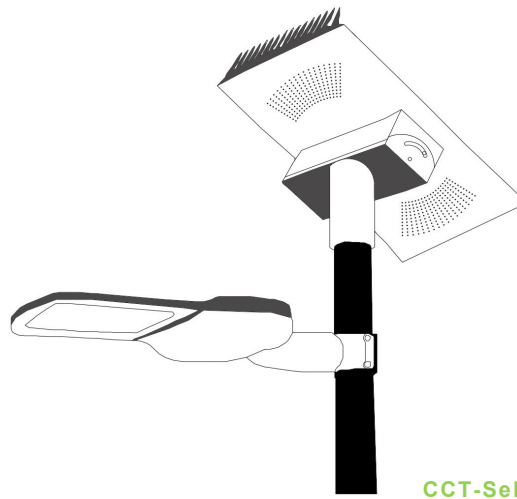

Photometric Diagram

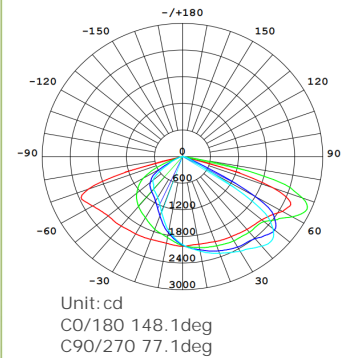

Single Head Solar Streetlight Kit:

Model : Urx-SL-S

Power:15W

3CCT : 3000K/4000K/5000K Selectable

Optics: T2M Lens

Solar panel:424*403*24mm

Solar module:30W,18VDC

Composition:Monocrystalline Silicon PV

Battery:Lithium Iron Phosphate LiFePO4,12Ah / 144Wh

Weight:Panel 7.1kg. Light head 4.5kg



Double Head Solar Streetlight Kit:

Model : Urx-SL-T

Power:15w+15w

3CCT : 3000K/4000K/5000K Selectable

Optics: T2M Lens

Solar panel:803*424*24mm

Solar module: (30W,18VDC) x2

Composition:Monocrystalline Silicon PV

Battery:Lithium Iron Phosphate LiFePO4,12Ah / 144Wh x2

Weight:Light head 4.5kg x2 , Panel 14.8kg

