


## Vivid

Vid380

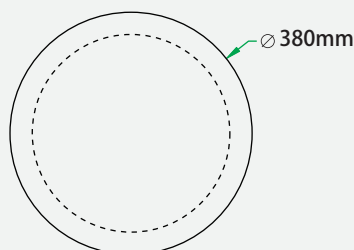

A slimline quick installation ceiling light with improved efficacy and output.


Vivid comes with quick fit mounting bracket, integral control gear and offers discrete appearance for residential, commercial and retail applications. Colour temperature can be set at 3000K, 4000K or 5000K with switch located on the back of the fitting.

Optional:  
DALI/0-10V Dimming



CCT-Select

Photometric Diagram

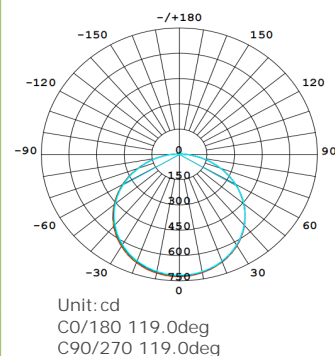

### KEY INFORMATION

Lumen Output	2,880 lm
Input Power	24W
Hole Cutout Size	N/A
Install	Surface Mount
Dimming Options	NON-DIMMABLE/DALI/0-10V DIMMABLE
Fitting Colour	WHITE
Warranty	5 yr
IP Rating	IP44
Ik Rating	N/A
IC Rating	N/A

### PHOTOMETRIC

Efficacy	120 lm/W
LED	SMD
CCT	3000/4000/5000K(CCT-select)
CRI	>80
Beam Angle	120°

### ELECTRICAL

Driver	Integral
Supply Input	200-240V,50/60Hz
Power Factor	>0.95
Useful life @Ta 25°(L70)	50,000hrs
Emergency time	N/A
Sensor	Microwave(Sensor optional)

### CONSTRUCTION

Housing	Polycarbonate
Optics	Polycarbonate
Adjustable Angle	N/A
Fixings/Hardware	Mounting plate
Connection Type	N/A
Total Weight	1.4 KG
Dimensions	φ380xH60mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1