

# Cone Sconce

## Installation Instructions

### Product Codes

CN-S-7W-W  
CN-S-7W-B  
CN-S-7W-W-010  
CN-S-7W-B-010



### Important Safety Information

Read all instructions before installation. Save instructions for later use.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

- Disconnect main power at the source prior to installation.
- Rated for damp locations.
- WARNING: Risk of fire or electrical shock.
- Designed to be used with a 2" x 4" J-Box.
- Installation hardware not included. Installer to provide site-specific hardware.


### Care Instructions

Gently wipe with a damp cloth to remove dirt, dust, and fingerprints.

Do not use any chemical cleaning solution.

## 01


Remove backplate by unscrewing the 2 screws from the top of the Cone Fixture using a 2mm drive hex key.

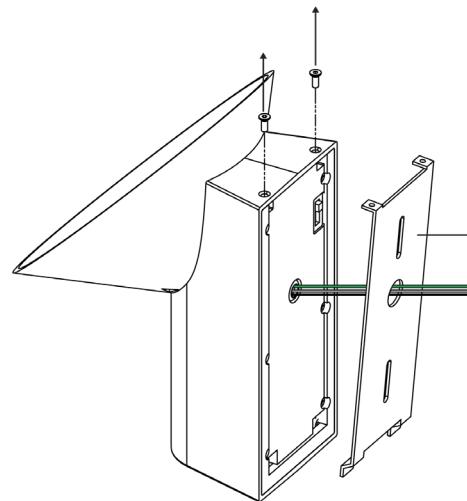

## 02

Use switch to select desired color temperature.


5K  
4K  
3.5K  
3K  
2.7K

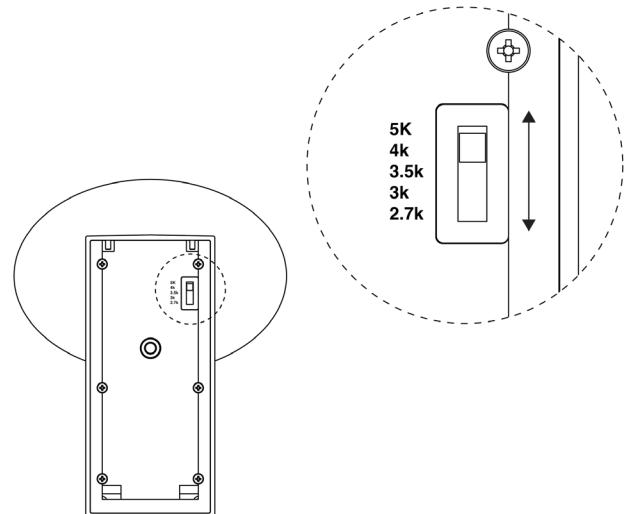

## 03


Make wire connections inside 2 inch x 4 inch junction box.

- Connect 2 white wires together using wire connector.
- Connect 2 black wires together using wire connector.
- Connect green wire to the ground wire using wire connector or other approved grounding method.

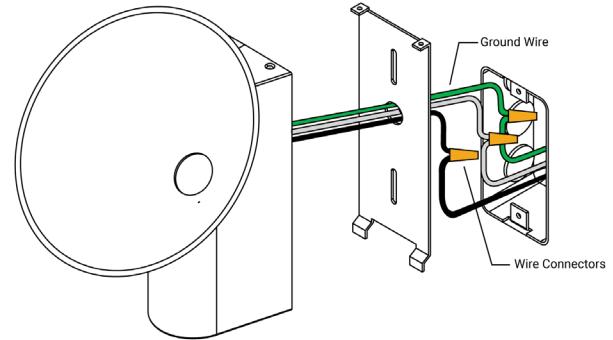

## 04

Attach backplate to 2 inch x 4 inch junction box using compatible screws.

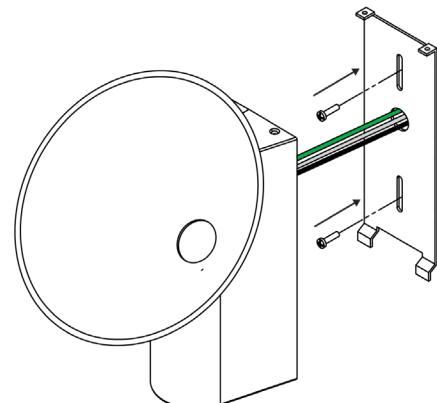

## 05

Re-attach Cone Fixture to backplate with 2 screws at the top of fixture using a 2mm drive hex key.

