

# Ring Pendant

## Installation Instructions

### Product Codes

RNG-P-9W-W

RNG-P-9W-B



### Important Safety Information

Read all instructions before installation. Save instructions for later use.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

- Disconnect main power at the source prior to installation.
- Suitable for dry locations only.
- WARNING: Risk of fire or electrical shock.

### Care Instructions

Gently wipe with a damp cloth to remove dirt, dust, and fingerprints.


Do not use any chemical cleaning solution.

## 01

Cut cord to desired length.

Make wire connections inside 4 inch x 4 inch octagonal junction box.


- Connect 2 white input wires together using wire connector.
- Connect 2 black input wires together using wire connector.
- Connect 2 red output wires together using wire connector.
- Connect 2 black output wires together using wire connector.
- Connect green wire to the ground wire using wire connector or other approved grounding method.
- Place driver in junction box.

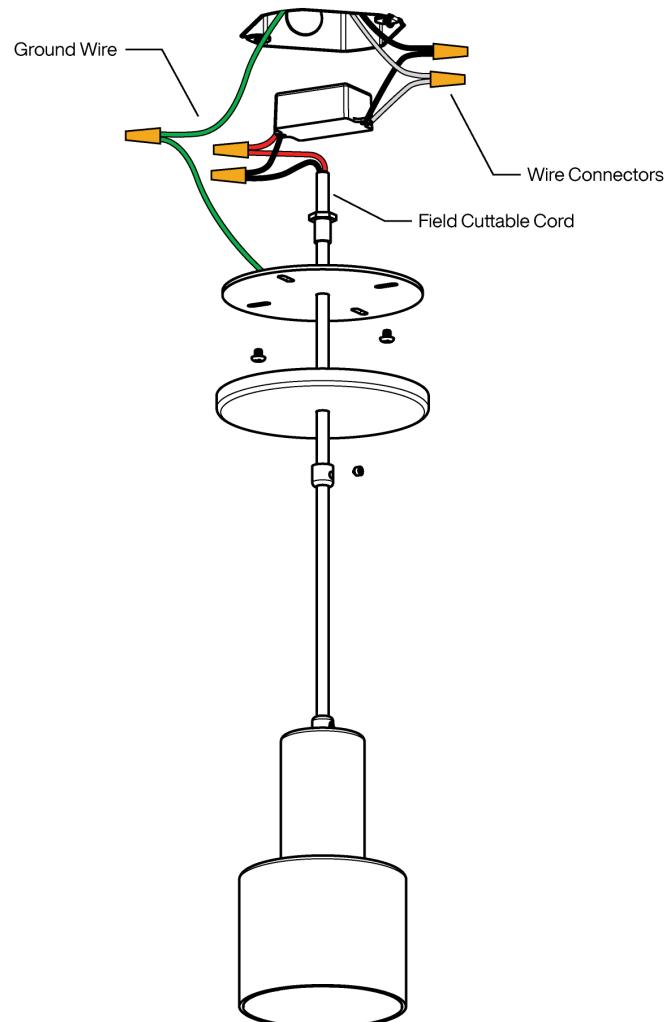



## 02

Attach crossbar to 4 inch x 4 inch octagonal junction box using screws.

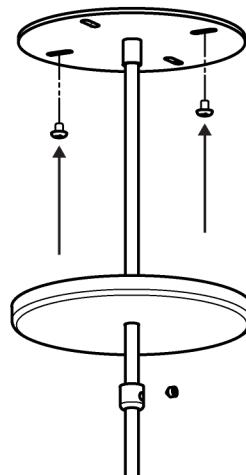

## 03

Lift canopy to ceiling and thread strain relief onto nipple.

Secure cord with strain relief set screw.

Use switch to select desired color temperature.

Color Temp Options: 5K, 4K, 3.5K, 3K, 2.7K

